

Job Name/Title: \_\_\_\_\_ Catalog Number \_\_\_\_\_  
 Contractor: \_\_\_\_\_ Notes: \_\_\_\_\_

# LED Office/Industrial Lighting

## Prismatic Linear Wrap Fixture

### Features


- Replacement for 4' 2x32W T8 or 2' 2x17W T8
- Steel housing with UV resistant powder coat finish
- Polycarbonate prismatic lens
- Ceiling box mount, surface mount or chain mount
- (3) 1/2" knockouts on back panel
- (2) 1/2" knockouts on each side panel

### Specs

- 105 Lumens Per Watt (LPW)
- 80 CRI
- 50,000 (L70) Average Rated Life
- -10°F to 110°F ambient rating
- THD: <20%; Power Factor: >.9
- 100° Beam angle
- Non Dimmable

### Applications

- Office and industrial lighting
- Hospitals
- Schools

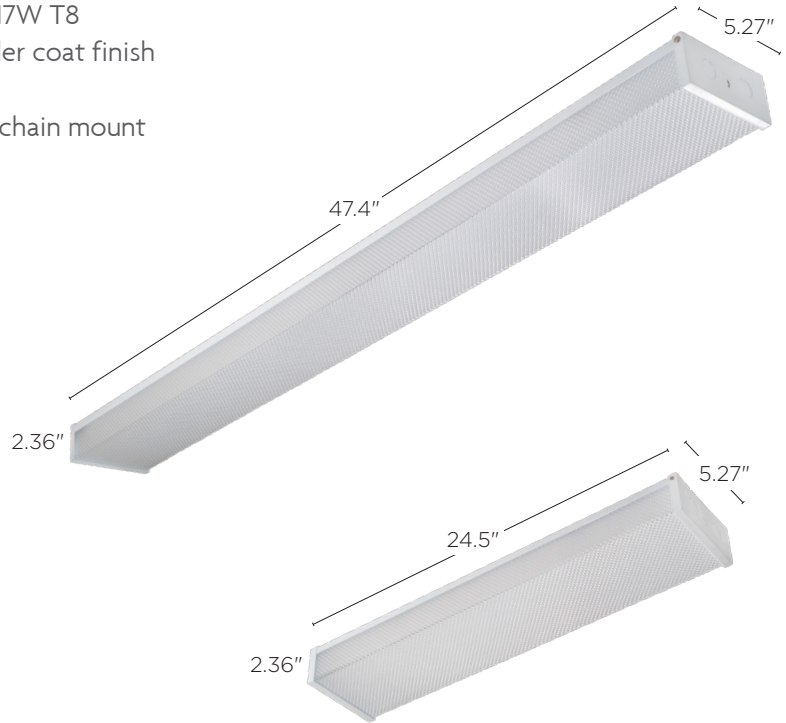

**Occupancy Sensor**  
 Item #: WD-OS  
 Product Code: 72700

Catalog Number	Product Code	UPC Code	Color Temp	Voltage	Amps at 120/277V	Watts	Lumens	Length (ft.)	Equiv Wattage	Case Qty
<b>F-LWRAP/20W/40K-75</b>	74265	751338030695	4000K	120-277VAC	0.2 / 0.10	20	2100	2	2x17W T8	1/12
<b>F-LWRAP/20W/50K-75</b>	74266	751338030701	5000K	120-277VAC	0.2 / 0.10	20	2100	2	2x17W T8	1/12
<b>F-LWRAP/40W/40K-75</b>	74267	751338030718	4000K	120-277VAC	0.4 / 0.2	40	4200	4	2x32W T8	1/6
<b>F-LWRAP/40W/50K-75</b>	74268	751338030725	5000K	120-277VAC	0.4 / 0.2	40	4200	4	2x32W T8	1/6

Specifications are subject to change without prior notice.

